

# FSP 150-GO102Pro Series

## Outdoor Carrier Ethernet and IP demarcation


### Benefits

- **Universal demarcation**  
Multi-layer Carrier Ethernet and IP integration for a single demarcation device
- **Synchronizing any cell site**  
Highly precise, assured distribution of time and frequency meeting LTE and emerging 5G requirements
- **Versatile mounting and compact design**  
Unobtrusive, compact and hardened design for a wide range of locations such as walls, poles and street cabinets
- **Service life cycle management**  
Comprehensive set of protocols for fast and efficient service activation, testing and monitoring
- **Operational convenience**  
Simple reset button enables ZTP process to be reinitialized without the need for local debugging
- **Open programmability**  
Open programming interfaces supporting bandwidth slicing and auto-provisioned bandwidth services

### Overview

Public outdoor small cells, Wi-Fi and closed circuit TV (CCTV) require connectivity services which end outside a controlled environment. But service providers don't want to invest in expensive and unsightly cabinets. That's why small environmentally sealed network demarcation devices are a game changer.

Communication service providers (CSPs) struggle to cope with a high number of specialized boxes. They need a single demarcation product that can cover a wide range of applications and be effective even under harsh environmental conditions. Our FSP 150-GO102Pro, a member of the market-leading FSP 150 family, makes a real difference. Its small size and low power consumption make it easy to install and simple to configure. It supports a comprehensive set of Carrier Ethernet and IP connectivity services. Automated testing and in-service monitoring protocols simplify any phase of the service lifecycle. What's more, our FSP 150-GO102Pro also provides precise synchronization. Such a unique combination of features makes it the perfect solution for connecting small cell sites.

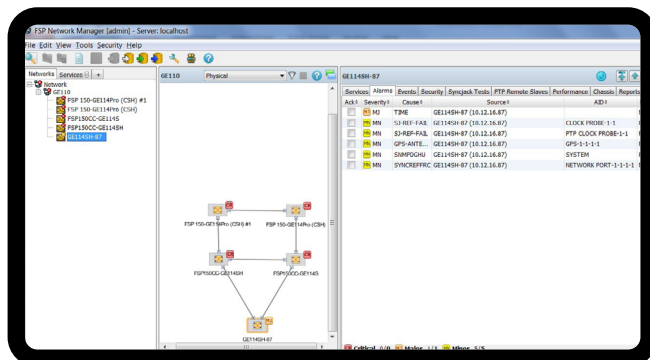

# FSP 150-GO102PRO SERIES

## High-level technical specifications

### Ruggedized outdoor housing

- Extended temperature range without fans
- Sealed housing for harsh environments
- Wall, pole and cabinet mounting

### Interfaces

- Client: two multi-rate FE / GbE ports
- Network: one multi-rate FE / GbE port
- Optical and electrical client interfaces

### Ethernet and IP

- Ethernet switching and IP forwarding
- Access control lists for L2-L4
- VRFs to isolate IP address spaces
- DHCP relay with static routes

### Synchronization

- Synchronous Ethernet on all interfaces
- IEEE 1588v2 Precision Time Protocol
- Boundary clock, slave clock and transparent clock

### Service activation and monitoring

- Automated service activation and testing (SAT)
- MEF CE 2.0 compliant OAM and configuration management
- Zero touch provisioning


### Management and programmability

- Local management and comprehensive Ensemble management and control
- Wide range of physical interfaces and protocols
- Open programming using NETCONF / YANG or OpenFlow

## Applications in your network

### Ruggedized cell site demarcation device for deployment on walls, poles and street cabinets

- Unique combination of Carrier Ethernet and IP features with synchronization capabilities
- Optional power-over-Ethernet (PoE) power sourcing equipment (PSE) on access ports for CCTV, Wi-Fi or any connected device
- Optional PoE-powered device (PD) on access ports for powering the device from subtended equipment
- Choice of variants to fit wide range of deployments from fully outdoors to tight spaces inside street furniture
- Integrates with Adtran optical access layer for efficient use of the fiber network; for instance using CWDM BiDi interfaces in a single-fiber working architecture

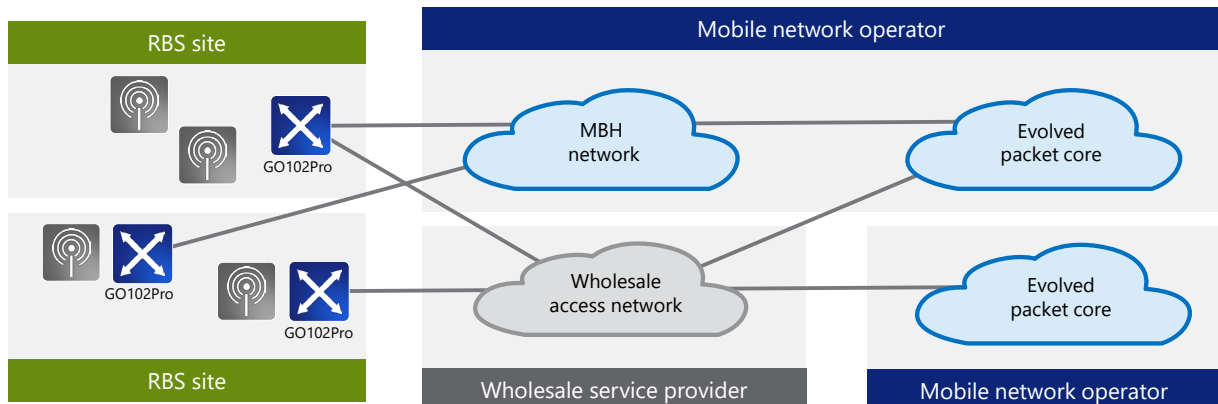

## FSP 150-GO102 Series overview

	Access ports	Network ports	Sync.	Power supply	PoE output	Power consumption (maximum)	Size	Operating temperature
<sup>1</sup> FSP 150-GO102Pro (S)	2	1	SyncE, PTP	Integrated AC, DC or PoE PD	-	12.95W	Compact Outdoor	-40°C to +70°C
<sup>2</sup> FSP 150-GO102Pro (SP)	2	1	SyncE, PTP	Integrated AC or DC	2x access ports	80W including PoE subtended devices	Compact Outdoor	-40°C to +65°C
<sup>3</sup> FSP 150-GO102Pro (Sm)	2	1	SyncE, PTP	External AC	-	12.95W	Ultra compact Outdoor	-40°C to +65°C

### Access capacity

- Two 10/100/1000BaseT or 100/1000BaseX (SFP) port<sup>1,2</sup>
- Two 10/100/1000BaseT ports<sup>3</sup>
- One access port can be reassigned to be network port<sup>1,2</sup>

### Network interface

- One 100/1000BaseX (SFP) port

### Synchronization

- ITU-T G.8261 / G.8262 / G.8264 Synchronous Ethernet on all interfaces
- Sync status message support
- IEEE 1588v2 precision time protocol (PTP)
- ITU-T G.8265.1 and G.8275.1 PTP Telecom Profile
- G.8271 Annex A.1.1 PPS / TOD out

### VLAN support

- 4096 VLANs (IEEE 802.1Q customer-tagged) and stacked VLANs (Q-in-Q service provider tagged)
- 2-tag management (push/pop/swap) for c-tag and s-tag
- IEEE 802.1ad provider bridging (c-tag, s-tag)
- Ethertype translation
- Eight Ethernet virtual circuits (EVC)
- 9612 byte-per-frame MTU transparency

### Layer 2 traffic management

- Acceptable client frame policy: tagged or untagged
- Service classification based on IEEE 802.1p, 802.1Q and IP-TOS/DSCP
- VLAN tag priority mapping (IEEE 802.1ad PCP encoding)

- MEF-compliant policing (CIR/CBS/EIR/EBS) with three-color marking and eight classes of service
- Port shaping on transmit for both client and network ports
- MEF 10.3 hierarchical policing with token-share envelopes
- DiffServ supporting WFQ/SP mix

### Layer 3 traffic management

- L2-L4 Access control lists (ACL) for classification
- VRF-lite virtual routing and forwarding supporting IPv4 and IPv6
- BGP and OSPF dynamic routing
- DHCP relay agent
- DSCP remarking

### Operation, administration and maintenance (OAM)

- IEEE 802.3ah EFM-OAM link management
- IEEE 802.1ag connectivity fault management (CFM) with hardware assistance
- ITU-T Y.1731 performance monitoring
- ITU-T Y.1564 service activation testing
- Terminal and facility loopbacks on port- and EVC-level for all interfaces
- Cable diagnostics with benchmarks (electrical interfaces only)
- Embedded RFC 2544 test generator and analyzer (ECPA)
- MEF-compliant Layer 2 control protocol disposition and extensive filter options for Layer 2 packet types
- Link loss forwarding to signal local link and network path failures
- Dying gasp message for power-failure alarming (EFM-OAM and SNMP trap option)

# FSP 150-GO102PRO SERIES

---

## Performance monitoring

- RFC 2819 RMON Etherstats on a per-port and per-service basis
- 15-minute and 1-day performance data bins
- IEEE 802.3ah/ITU-T G.8021 PHY level monitoring
- ITU-T Y.1731 single- and dual-ended frame loss measurement
- Synthetic frame loss and delay measurement for multi-point service monitoring
- TWAMP sender/reflectors for L3 based service assurance
- Multi-CoS monitoring on EVCs scaling up to 32 simultaneous SOAM flows
- Threshold-setting and threshold-crossing alerts
- Physical parameter monitoring for SFP optics, including TCAs
- Temperature monitoring and thermal alarms

## Zero-touch provisioning

- DHCP/BOOTP auto-configuration
- IEEE 802.1x port authentication (supplicant and authenticator)
- Text-based configuration files
- TFTP/SCP for software image upgrade and configuration file copy

## Management and security

### Local management

- USB connector using CLI
- Reset button<sup>1,2</sup>

### Remote management

- In-band VLAN and MAC-based management tunnels
- Fully interoperable with other FSP 150 products

### Management protocols

- IPv4 and IPv6 DCN protocol stacks, including dual-stack operation and 6-over-4 tunnels
- Telnet, SSH (v1/v2), HTTP/HTTPS, SNMP (v1/v2c/v3)
- NETCONF/YANG, OpenFlow

## Secure administration

- Configuration database backup and restore
- System software download via FTP, HTTPS, SFTP or SCP (dual flash banks)
- Remote authentication via RADIUS/TACACS
- SNMPv3 with authentication and encryption
- Access control list (ACL)

## IP routing

- DHCP, RIPv2 and static routes, ARP cache access control

## System logging

- Alarm log, audit log and security log

## Regulatory and standards compliance

- MEF CE 2.0 compliant
- IEEE 802.1Q (VLAN), 802.1p (Priority), 802.1ag (CFM), 802.3ah (EFM), 802.1x
- ITU-T Y.1731, G.8010/Y.1306, G.8011.1+2
- MEF-6.1, -9, -10.3, -11, -14, -20, -21, -22.1, -23.1, -25, -26.1, -30, -33, -35, -36
- IETF RFC 2544 (frame tests), RFC 2863 (IF-MIB), RFC 2865 (RADIUS), RFC 2819 (RMON), RFC 5357 (TWAMP)
- MEF-compliant ITU-T Y.1564 service activation testing
- IEEE 802.3at Type 1 Powered Device<sup>1</sup> (DC variant only)
- IEEE 802.3at Type 2 Power Sourcing Equipment<sup>2</sup>
- ANSI C84.1-1989
- ETSI 300 132-2, BTNR2511, ETS 300-019, ETS 300-019-2-[1,2,3,4], ETS 300-753
- Telcordia GR-499<sup>1,2</sup>, GR-63-CORE<sup>1,2</sup>, GR-3108-CORE<sup>1,2</sup>, SR-332<sup>1,2</sup>
- Safety IEC/UL/EN 62368-1, 21CFR1040.10, EN 60825, EN 50371, EN 300-386, EN 50160, IEC 60320/C14
- EMI EN 300-386<sup>1,2</sup>, EN 61000-4-5<sup>3</sup>, GR-1089-CORE<sup>1,2</sup>, ETS 300-132, FCC Part 15, Class A<sup>1,2</sup> B<sup>3</sup>, Industry Canada

## Environmental

- Dimensions (W x H x D):
  - 160mm x 240mm x 67mm / 6.3" x 9.4" x 2.6"<sup>1,2</sup>
  - 100mm x 145mm x 52.3mm / 3.9" x 5.7" x 2.1"<sup>3</sup>
- Operating temperature:
  - FSP 150-GOI02Pro (S): -40 to 70°C
  - FSP 150-GOI02Pro (SP): -40 to 65°C
  - FSP 150-GOI02Pro (Sm): -40 to 65°C
  - GR-3108-CORE Class 1, 2, 3<sup>1</sup>, 4, ETSI EN300 019-1-3.1, 3.2, 3.3\*, 3.4<sup>1</sup>, 3.5, 3.6, 4.1, 4.1E\*\*, 4.2H<sup>1,2</sup>
- Storage temperature:
  - -40 to +70°C (GR-63-CORE, ETS 300 019-1-1)
- Humidity:
  - 5 to 100% condensing (GR-3108-CORE Class 1, 2, 3<sup>1</sup>, 4, ETSI EN300 019-1-3.1, 3.2, 3.3\*, 3.4<sup>1</sup>, 3.5, 3.6, 4.1, 4.1E, 4.2H<sup>1,2</sup>)
- Enclosure sealing: IEC 60529 IP65<sup>3</sup> / IP67<sup>1,2</sup>
- Climatic, biological, chemical, mechanical substances, mechanical, EMC, electrical, fire, acoustic and earthquake conditions conform to GR-3108-CORE 6, ETSI EN300 019-1-3-5, 1-4-5
- Integrated PSU<sup>1,2</sup>:
  - 110/240 VAC,
  - -48 to -72VDC
  - PoE-powered device<sup>1</sup>, 802.3at type 1
- External PSU<sup>3</sup>: 110/240 VAC
- Power consumption:
  - Minimum: 8.0W;
  - Nominal: 10.6W<sup>1,3</sup> / 87.4W<sup>2</sup>;
  - Maximum: 12.9W<sup>1,3</sup> / 94.7W<sup>2</sup> (including power supplied to 2xPoE devices, 30W each)

\* Excluding solar load for FSP 150-GOI02Pro (Sm)

\*\* Minimum operating temperature restricted to -40°C

## Product legend

<sup>1</sup> FSP 150-GOI02Pro (S)

<sup>2</sup> FSP 150-GOI02Pro (SP)

<sup>3</sup> FSP 150-GOI02Pro (Sm)



June Copyright © 2023 Adtran, Inc. All rights reserved. Adtran believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. Adtran and the other trademarks listed at [www.adtran.com/trademarks](http://www.adtran.com/trademarks) are registered trademarks of Adtran, Inc. or its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

Adtran warranty duration and entitlements vary by product and geography. For specific warranty information, visit [www.adtran.com/warranty](http://www.adtran.com/warranty).

Adtran products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding exportation of Adtran items (e.g. commodities, technology, software), please visit [www.adtran.com/exportlicense](http://www.adtran.com/exportlicense).

